




# 安利消防器材有限公司 Safety Fire Fighting Equipment Ltd.

消防處註冊消防裝置承辦商 • 機電工程署註冊電業承辦商

## 緊急後備照明燈 (發光二極管) Automatic Emergency Light (LED)

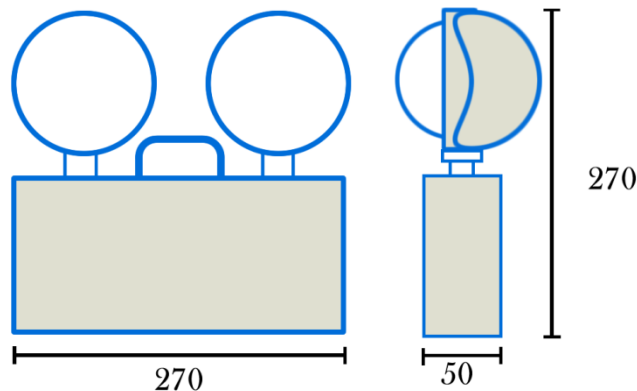

|                            |   |
|----------------------------|---|
| Model No. / 型號             | <b>6V3L</b>   |
| Housing / 外殼               | 金屬材料，外焗塗粉狀樹脂漆油<br>Metal materials with Epoxy Powder Coating   |
| Head Lamp / 燈頭             | 防火 ABS 材料，電子線採用 UL1015<br>Fire Resistant ABS materials, Electric Wire used by UL 1015                                       |
| Rechargeable Battery / 充電池 | Ni-Cd 3.6V 800mAh (full charged within 12 hrs)  |
| Normal Output / 輸出功率       | 1W (excess 2 meters more than 2 lux)  |
| Inner features / 燈內裝置      | 防火線路版及 UL 防火電子線<br>Fire Resistant P.C. Board & UL Fire Resistant Wire   |
| Outside features / 燈外裝置    | 紅色電源指示燈、綠色充電池指示燈、測試掣及 OFF 掣<br>“RED” Power indication light, “Green” re-charger battery light, Test switch and “OFF” switch |
| Discharge Duration/可亮時間    | Over 2 Hours  |
| Circuit Design / 線路設計      | 一份低電壓斷路器，以便於充電池耗盡後將電池截斷<br>A low voltage cut out to disconnect the battery when fully discharged                            |
| Testing Report / 測試證書      | <b>China Electric Testing Centre Ltd.</b> DNS#:ELS20100206-001  |
| Testing Standard / 測試標準    | 香港消防處牌照及審批總區: [PPA/104(A) 第四次修訂]<br>HKFSD Licensing & Certification Command [PPA/104(A) 4 <sup>th</sup> Revision]           |
| Line Voltage / 電壓          | AC 220 - 240V 50 Hz   |
| Weight / 重量                | 1.50 kg   |
| Dimension / 燈箱尺寸           | 270 x 270 x 50mm  |

All photos are for reference only. 圖片只供參考

All Technical Information is provided by Manufacturer. The Dealer is not held responsible for any inaccuracies in the data.

香港灣仔麥加力歌街 1-19 號加達樓地下 C1 舖 website: [www.FIRE.hk](http://www.FIRE.hk) e-mail: [safety@fire.hk](mailto:safety@fire.hk)  
Shop C1, G/F, Cactus Mansion, 1-19 McGregor Street, Wan Chai, HK Tel: 2866 6895 Fax: 2866 6795